

orkanda



ORKA 150

Open platform lift

Orka 150 is Open Platform Lift, also known as Wheelchair Lift, which provides internal or external vertical travel up to 3 meters.

Our Open Platform Lift can accommodate changes

in level from 600 mm up to 3000 mm in commercial and domestic environments and is appropriate alternative solution to a fully enclosed platform lift. Orka 150 is specifically designed for applications with little or no alterations to existing buildings.

Features



Modern lightweight design



Stainless steel construction as option



Low space requirements



High level of security



Silent operation



Simple to use



No pit required



Simple to install and easy to service




overall low maintenance and running costs

Door top landing

Protective steel cover in machine side

Platform Door (aluminium & glass)

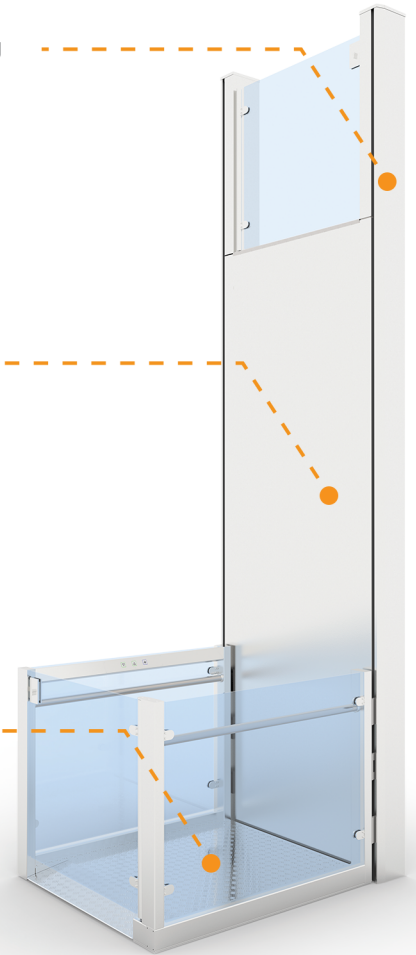

Options

PLATFORM
900 × 1400mm
1000 × 1400mm



CONTROL

Configurable control side
Dual control on the platform
Auto dialer on the platform
Remote control
Braille on the control



SAFETY

Battery emergency lowering device

GATE

Automatic upper gate
Automatic lower gate

FINISH

Painted in any RAL color
Brushed Stainless Steel

Specifications



USER GROUP

Ambulant and wheelchair users

2

Number of stops

Platform Size
1100 × 1400mm
(Standard)

DRIVE TYPE

BELT



LIGHTING

Controls illuminated

MACHINE ROOM

Integral to guide rails

SUITABILITY

For internal or external use

400kg

Maximum Capacity

External Dimensions
1300 × 1770mm
(Standard)



Power

220-240 V
1 phase, 16A

SAFETY EDGE

Safety edge-under platform proximity sensors



FLOOR

Anti slip rubber (Anti slip diamond plate for outdoor version)

TRAVEL

600mm
up to
3000mm



TOP HEIGHT

1100mm

Gate
1300 × 1770mm
(Standard)
with auto closers

380-400 V
3 phase, 10A, 50 Hz

HANDRAIL

Integrated to lift cabin (on both sides)

FINISH

RAL 9006 (White aluminium)